


CBBKP06SNN-01 3U CompactPCI PlusIO Backplane


GENERAL SPECIFICATIONS

Dimensions (WxH)	120.92 x 128.7 mm
Eurocard form factor	3U height / 24 TE
Nr of Layers	14
PCB thickness	4 mm
PCB material	PCL-370HR
cPCI PlusIO System Slot	One
cPCI Peripheral Slot	One, supports P2 rear I/O with AB-type shroud
cPCI Bus	32-bit/33MHz
cPCI Serial Slot	One slot, support PCIe x4, SATA
V (I/O)	3V3 or 5V selectable, factory default is 5V
Power Supply Slot	The PSU requires two slot / 8TE Connector: One 47 pin Positronic connector
Input Power Connector	Molex: 38720-7503
Other Connectors	- EPT Power terminal (910-60045) for 5V, 3.3V, +12V, -12V and Ground - DSUB15: VGA and USB 2.0 (to be used only with CPCI-3511 from Adlink Technology)

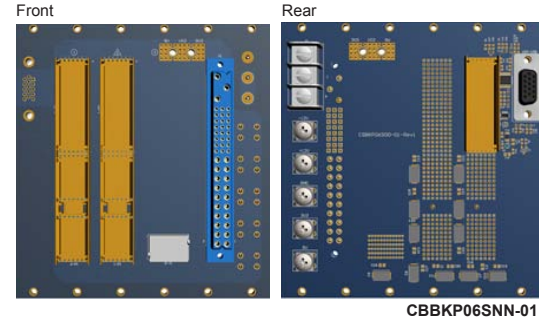

CBBKP06SNN-01

Layout

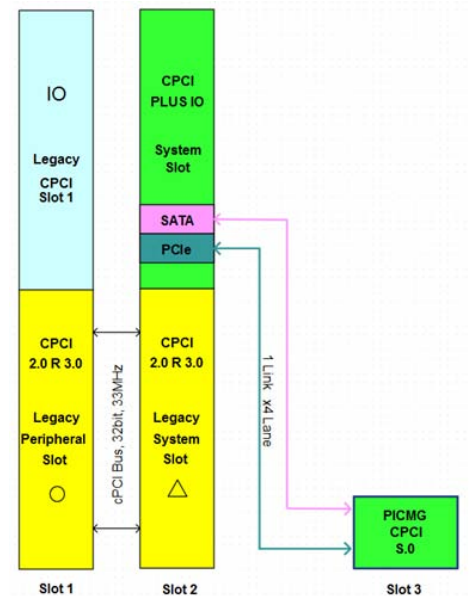

ORDERING INFORMATION

CBBKP06SNN-01	3U 24TE CompactPCI PlusIO backplane with rear VGA and USB; suitable for right 3U 8TE CompactPCI PSU
----------------------	---