


### RP-119QD



FC CE RoHS REACH

### Drawer Features & Display Benefits


- ▶ 1U 19" LCD drawer
- ▶ Built-in Quad Display
- ▶ Green LED-backlit panel technology
- ▶ Ideal for CCTV security & industrial control
- ▶ Sliding LCD allowing LCD to remain open when the rack door is closed

**Option** ● DC power : 12V / 24V / 48V / 125V / 250V

### Front QD membrane button



### Rear I/O

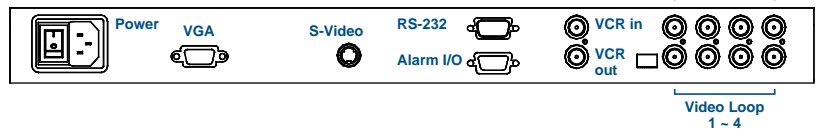

### Specifications

#### • LCD Panel

|                        |             |
|------------------------|-------------|
| Manufacturer :         | <b>AUO</b>  |
| Size (diagonal) :      | 19" TFT     |
| Max resolution :       | 1280 x 1024 |
| Brightness (cd/m2) :   | 250         |
| Backlight :            | LED         |
| Colors :               | 16.7 M      |
| Contrast ratio (typ) : | 1000 : 1    |
| Viewing angle (H/V) :  | 170° x 160° |
| Active area (mm) :     | 376 x 301   |
| MTBF (hrs) :           | 30,000      |
| Video input :          | VGA         |

• **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

#### • Power Consumption

|                     |          |
|---------------------|----------|
| Sreen on :          | Max. 25W |
| Power saving mode : | Max. 4W  |
| Power button on :   | Max. 1W  |

#### • Environmental

|                          |                                    |
|--------------------------|------------------------------------|
| Operating temperature :  | 0 to 55°C degree                   |
| Storage temperature :    | -20 to 60°C degree                 |
| Operating humidity :     | 20~90%, non-condensing             |
| Storage humidity :       | 5 ~90%, non-condensing             |
| Operating altitude :     | 16,000 ft                          |
| Non-operating altitude : | 40,000 ft                          |
| Shock :                  | 10G acceleration ( 11ms duration ) |
| Vibration :              | 5~500Hz 1G RMS random vibration    |

• **Casing Color :** Black ( RAL 9005 )

#### • Regulatory

|                 |                         |
|-----------------|-------------------------|
| Safety :        | FCC & CE certified      |
| Environmental : | RoHS2 & REACH compliant |

#### • Weight

|         |                     |
|---------|---------------------|
| Net :   | 12.5 kgs / 27.5 lbs |
| Gross : | 18.5 kgs / 40.7 lbs |

#### • Dimensions

|           |   |
|-----------|---|
| Product : | 442 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch |
| Packing : | 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch |

### Diagrams ( mm )

